

INSTRUCTIONS NOTES

This manual provides information on the proper use and storage of the product and accessories, and assists the user in dealing with questions about their use and in understanding the safety precautions to be taken.

PLEASE READ CAREFULLY

hen handing the product over to another person, be sure to include this manual, heed all warnings and follow all instructions in the manual.

2 YEAR WARRANTY DESCRIPTION

ne warranty, which applies to all purchasers from our authorised dealers, vers any defects caused by production, as well as failures in the course of rmal use, excluding physical damage, natural disasters (fire, flood, earthquake ghtning, etc.) and chemical corrosion, unauthorised repairs, replacement of omponents during handling, collisions at the site of the installation and other ailures due to human or force majeure reasons. and damage, or the manual ny malfunction caused by acts expressly prohibited by the instruction manual

ACCESSORY DESCRIPTION

Mobile phone clip, camera frame, hand screws and other accessories are consumables (not in the 2-year warranty), after use, please confirm whether there is aging, damage and other conditions of this phenomenon is normal wear and tear, in order to use the convenience of please contact the dealer in time to buy new parts replacement!

MAINTENANCE METHODS

Please use a soft sponge, soft cloth, dry cloth to clean the product regularly, do not use bleach, wire ball wipe, wipe clean and keep the product dry.

1

For more information on LENSGO product features, Please visit WWW.lensgo.net



INSTRUCTIONS

40SHC is a COB 40W, dual colour temperature 2700-7000K adjustable, lour rendering index ≥96, burst flash, along the vintage flash styling of the nstant light, mobile phone / camera can be used! CREATIVE SCENE LIGHTING EFFECTS ating different personalised atmospheres to enhance the quality o the image shot

- WITH SILICONE SOFTBOX
- 0%-100% BRIGHTNESS ADJUSTABLE

rning the adjustment knob, the htness change range is 0-100%.

SPECIFICATION


MODEL:	40SHC	
TYPE:	COB 40W	
Charging port:	TYPE - C / DV	
Jadeite thumb ring:	≥96	
Batteries:	4 x 18650 14.8V	
Charging Voltage:	12V 2A	
Duration of use:	Approx. 1 hour (when used at maximum brightness)	
Adjustment range:	Brightness adjustment 0%	
Number of beads:	Total 192 pcs	
Bead Voltage:	36 ~ 68V	
Bead Current:	1100mA	
	4	






always on



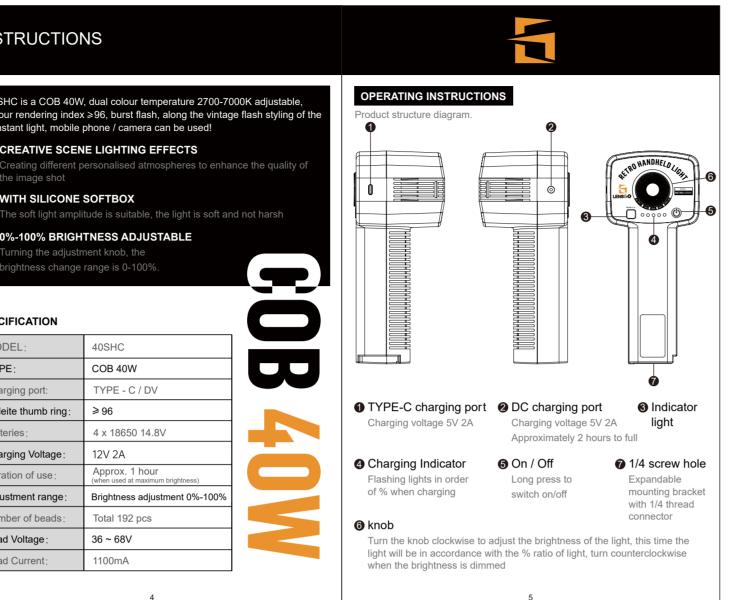

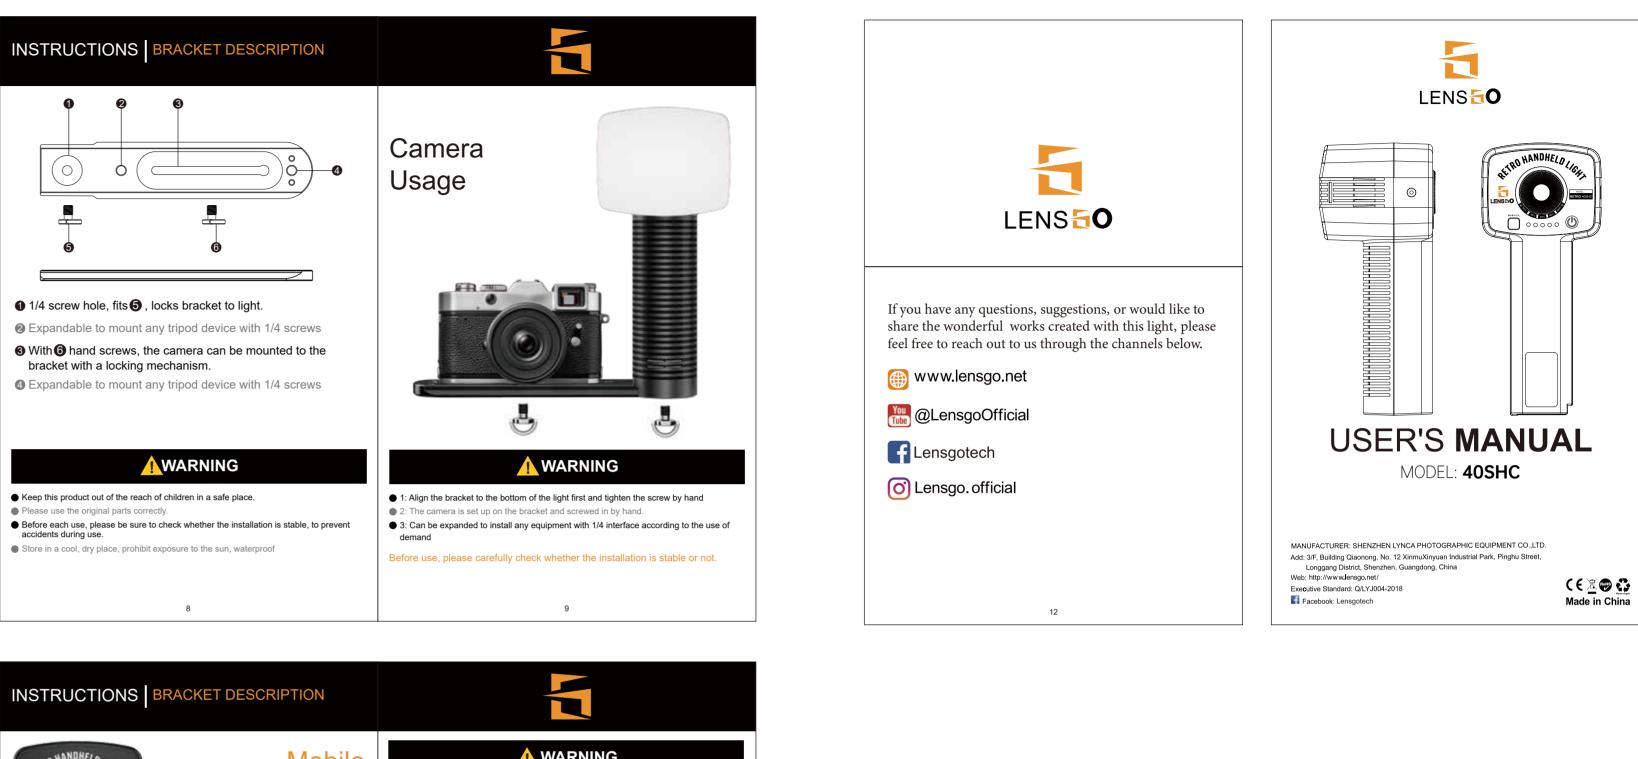

ALTRO MAINTELO LIGH	IVIODIIE	
5	phone usage	Do not touch the COB lamp beads wi
LINSBO	Adjustable horizontal/vertical racket	• This product is a precision instrument
		Contact authorised service personnel
		 It is recommended to use the original product caused by the use of non-Lor covered by our warranty. Any damage warranty.
	 Please clean the product with a soft, or 	
		 This specification is based on our rigo are subject to change without notice
		 Please keep it in a safe place, read the observe all precautions
MORE BOOK	 Before use, please check whether the accidents during use. 	
The second secon		 Please switch off the product after challing of the battery, try not to use it duri charging.
		Do not cover the ventilation holes where
9	9	CERTIFICATE O
<u>i</u> v	VARNING	
• 4. Alian the breekst to the bottom of the	Links F and and Kinkson the second back have d	PRODUCT NAME::
 1: Align the bracket to the bottom of the 2: The camera is set up on the bracket 	5 S ,	MODEL:
	oment with 1/4 interface according to the use of	
demand		INSPECTION DATE:
Before use, please carefully check w	hether the installation is stable or not.	INSPECTOR:

COB lamp beads with your hands to prevent burning hands precision instrument, please avoid dropping it when using it.

ed service personnel when repairs are required

ed to use the original LENSGO cables. Any damage to this y the use of non-Longsong original accessories is not varranty. Any damage to this product is not covered by our

product with a soft, dry cloth.

n is based on our rigorous testing. Design and specifications

a safe place, read this instruction manual carefully, and

e check whether the installation is stable, to prevent

f the product after charging, in order to protect the safety and , try not to use it during charging. use the product during

ventilation holes when using the silicone softbox.

IFICATE OF CONFORMITY

